RETAIL WEIGHING SOLUTION™

SW-II series

Smart Weighing Scale

As a simple weighing scale with a maximum of 1/30,000 resolution, SW-II is suitable in a variety of industrial environments, including traditional market, with its low body and ergonomics design.

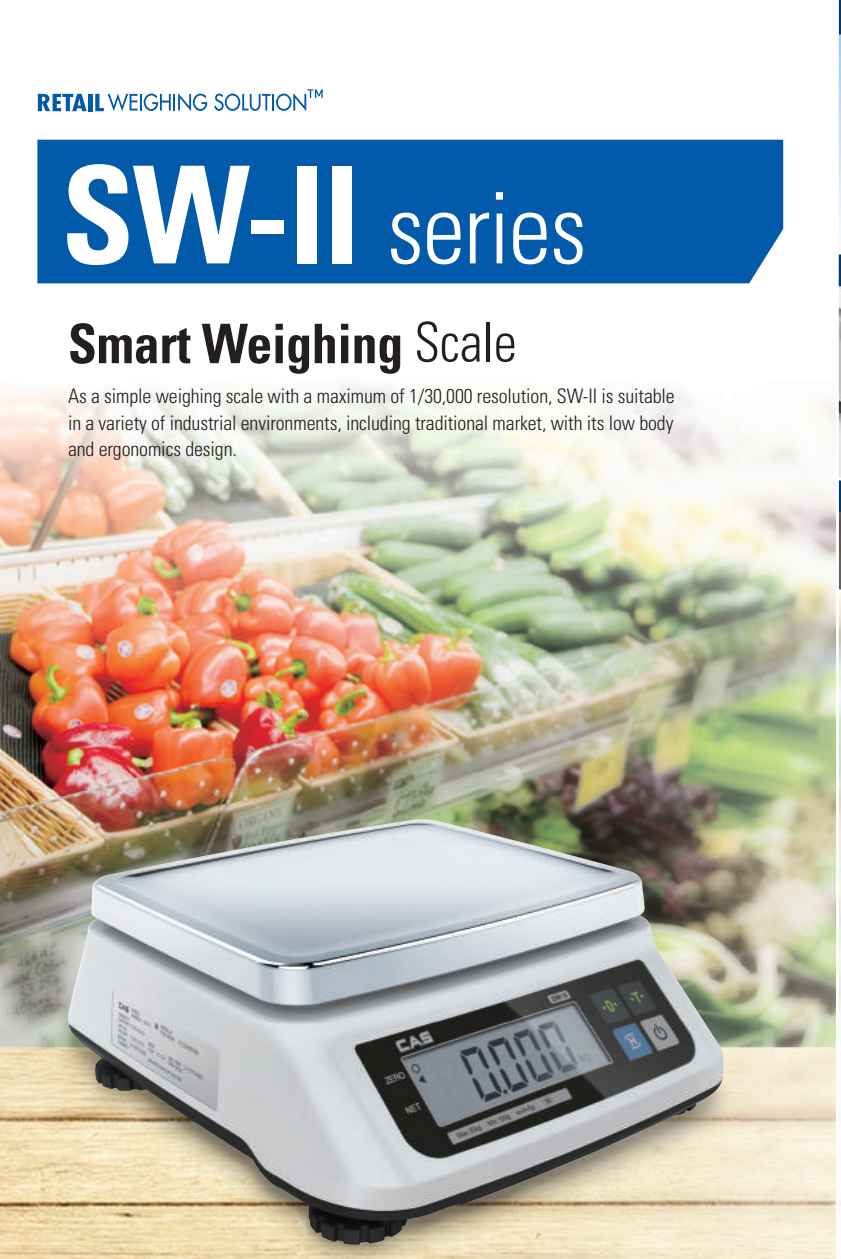

Easy Grab Body

Rear Display

USB Port

High Resolution for Weighing (Max. 1/30,000, Certificate 1/3,000 dual)

Easy Grab Body

USB Port for COMM. & Power

Rear Display for Customer

Scan with your smartphone to find more products

CAS

www.globalcas.com

TOTAL WEIGHING SOLUTION™

SW-II series

Smart Weighing Scale

FEATURE

- High Resolution for Weighing (Max. 1/30,000, Certificate 1/3,000 dual)
- Easy Grab Body
  - Ergonomics design with a low body and comfortable handling

- USB Port for COMM. & Power (Option)

- Rear Display for Customer (Option)

- Rechargeable Battery (Option)
  - A maximum of 1,000 hours when used with Mn or Pb battery together

OPTION

- RS-232 (Print, Command)
- Rear Display
- Rechargeable Battery & Adaptor
- USB Port
- SUS Tray

APPLICATION

- Open market, Farm, Industrial Environment

SPECIFICATIONS

MODEL	SW2-03	SW2-06	SW2-15	SW2-30
Capacity	3kg	6kg	15kg	30kg
e	0.5/0.2/0.1(g) 1/0.5(Certi.)	1/0.5/0.2(g) 2/1g(certi.)	2/1/0.5(g) 5/2g(certi.)	5/2/1/(g) 10/5g(certi.)
Resolation	1/3,000 ~ 1/30,000	1/3,000 ~ 1/30,000	1/3,000 ~ 1/30,000	1/3,000 ~ 1/30,000
Display	6Digit LCD (115x39.5mm) & Back light (White)			
Symbols	STABLE, ZERO, TARE, g, kg, lb, oz, PCS, Low Battery HI / OK / LO & PCS			
Keys	ZERO, TARE, MODE , FUNCTION KEY, ZERO / UNIT, TARE / HOLD, MODE, FN			
Functions	Hold, Unit Conversion, Counting-Counting SampleRange:10~100,200,300,400,500 Weight Comparison Function : hi, ok, low Sleep Mode Function			
Operation Time	Apporx. D size Battery = 500hr Or Pb Battery = 450hr (Backlight off)			
	Approximately 1,000 hours consecutively when equipped with Mn Battery and Pb Battery altogether			
Option	RS-232 (Print , Command), Rear Display Rechargeable Battery And Adaptor, USB Port, SUS Tray			
Power	1.5V x 3 units (D size Battery) or Pb battery 4V 4Ah or 6V Adapter			
Dimensions	245 (W) x 280(D) x 110(H)			
Platter Size	225(W) x 190 (D)			

DIMENSION

Unit:mm

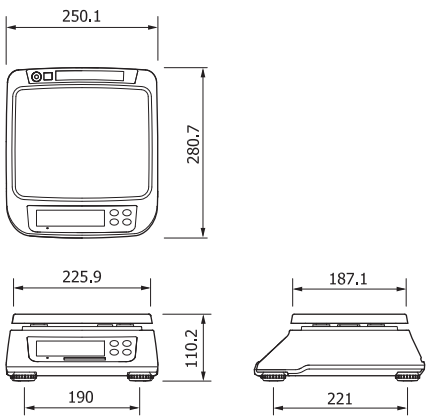

CAS BLDG., 1315, YANGJAE-DAERO,
GANGDONG-GU, SEOUL, KOREA
TEL_ 82 2 2225 3500
FAX_ 82 2 475 4668
Specifications are subject to change without notice improvement

http://www.globalcas.com